



DIN 931 - ISO 4014 - UNI 5737 Hex Bolts

DIN 931 - ISO 4014 - UNI 5737 Sechskantschrauben


DIN 931 - ISO 4014 - UNI 5737 Boulons hexagonaux

DIN 931 - ISO 4014 - UNI 5737 Vite a testa esagonale

DIN 931 - ISO 4014 - UNI 5737 Tornillo hexagonal

Quality: 4.6 / 4.8 / 5.6 / 5.8 / 6.8 / 8.8 / 10.9 / 12.9

Coating Type: Zinc Plated / Hot Dip Galvanized / Geomet / Black Oxide

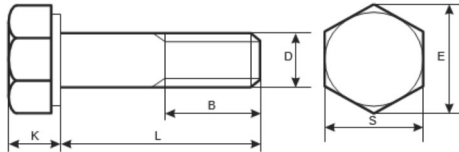

Size – D	Pitch (p)	E (Min.)	S (Min.)	S (Max.)	B		K (Min.)	K (Max.)
					L ≤ 125	L : 125-200		
M8	1.25	14.38	12.57	13	22	28	-	5.6
M10	1.5	17.77	15.57	16	26	32	45	7
M12	1.75	20.03	17.57	18	30	36	49	8
M16	2	26.17	23.16	24	38	44	57	10.29
M18	2.5	29.56	26.16	27	42	48	61	11.85
M20	2.5	32.95	29.16	30	46	52	65	12.85
M22	2.5	37.29	33	34	50	56	69	14.35
M24	3	39.55	35	36	54	60	73	15.35
M27	3	45.2	40	41	60	66	79	17.35
M30	3.5	50.85	45	46	66	72	85	19.12
M33	3.5	55.37	49	50	72	78	91	21.42
M36	4	60.79	53.8	55	78	84	97	22.92
M39	4	66.44	58.8	60	84	90	103	25.42
M42	4.5	71.3	63.1	65	90	96	109	26.42
M45	4.5	76.95	68.1	70	96	102	115	28.42
M48	5	82.6	73.1	75	102	108	121	30.42
M52	5	88.25	78.1	80	110	116	129	33.5
M56	5.5	93.56	82.8	85	118	124	137	35.5
M60	5.5	99.21	87.8	90	-	132	145	38.5
M64	6	104.86	92.8	95	-	140	153	40.5