



DIN 6914 - EN 14399 - UNI 5712 HV Hex Bolts

DIN 6914 - EN 14399 - UNI 5712 Sechskantschrauben


DIN 6914 - EN 14399 - UNI 5712 Boulons hexagonaux

DIN 6914 - EN 14399 - UNI 5712 Vite a testa esagonale

DIN 6914 - EN 14399 - UNI 5712 Tornillo hexagonal

Quality: 10.9 / 12.9

Coating Type: Zinc Plated / Hot Dip Galvanized / Geomet / Black Oxide

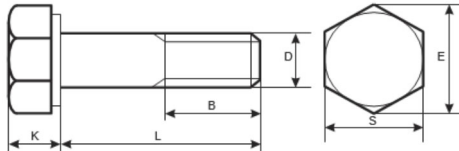

Size – D	Pitch (p)	E (Min.)	S (Min.)	S (Max.)	B (Min.)	B Max.)	K (Min.)	K (Max.)
M16	2	29.56	26.16	27	28	30	9.25	10.75
M20	2.5	35.03	31	32	33	35.5	12.1	13.9
M22	2.5	39.55	35	36	34	36.5	13.1	14.9
M24	3	45.2	40	41	39	43	14.1	15.9
M27	3	50.85	45	46	41	45	16.1	17.9
M30	3.5	55.37	49	50	44	49.5	17.95	20.05
M36	4	66.44	58.8	60	52	59	21.95	24.05
M39	4	71.3	63.1	65	68	75	23.95	26.05
M42	4.5	76.95	68.1	70	74	82.5	24.95	27.05
M45	4.5	82.6	73.1	75	76	84.5	26.95	29.05
M48	5	88.25	78.1	80	82	92	28.95	31.05
M56	5.5	99.2	87.8	90	90	101.5	33.75	36.25
M64	6	110.5	97.8	100	100	113	38.75	41.25